



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

1304/52264

MAILED 08 NOV 2004

WIPO

PCT

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

**Patentanmeldung Nr. Patent application No. Demande de brevet n°**

03104152.8

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

**BEST AVAILABLE COPY**



Anmeldung Nr:  
Application no.: 03104152.8  
Demande no:

Anmeldetag:  
Date of filing: 11.11.03  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Philips Intellectual Property GmbH

20099 Hamburg  
ALLEMAGNE  
Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se referer à la description.)

Computed examination of an object by using coherent-scattered radiation

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G01V5/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

**DESCRIPTION**

Computed examination of an object by using coherent-scattered radiation

The present invention relates to the field of examination of an object by using coherent-scattered radiation. More particularly, the present invention relates to an examination  
5 apparatus for examining an object of interest, a method of examining an object of interest with an examination apparatus and a computer program product executed on an examination apparatus for examination of an object of interest.

Known scanners using coherently-scattered x-rays comprise mechanical components  
10 which require precision movements. Due to the required precise movement of these mechanical components, these scanners are often very bulky and heavy which makes a transportation of these scanners difficult. Also, due to the precise adjustment of the elements performing these precise movements, a readjustment may be required each time the scanner is moved.

15 However, there are many situations in which it would be desirable to have a compact device for examining objects of interest. For example, there may be a need for portable baggage scanners for examining objects left in public areas, such as airport terminals, or in places where there is no scanning facility available and where it may be inconvenient  
20 or potentially dangerous to transport the suitcase or object of interest to a baggage scanner.

It is an object of the present invention to provide for an examination apparatus such as a scanner which is movable.

25 According to an exemplary embodiment of the present invention as set forth in claim 1, the above object may be solved with an examination apparatus for examining an object of interest, which comprises a source of radiation for generating a first radiation penetrating the object of interest and a scatter radiation detector for detecting a second

radiation of the first radiation, wherein the second radiation is scatter radiation which is scattered from the object of interest. The scatter radiation detector is stationary during scanning of the object of interest and the source of radiation is displaceable during the scanning of the object of interest.

5

In other words, according to this exemplary embodiment of the present invention, an examination apparatus for examining an object of interest is provided, in which the source of radiation may be the only moving part during scanning. The source of radiation generates a first radiation beam penetrating the object of interest. This first  
10 radiation beam is then scattered within the object of interest and the resulting scatter radiation is detected by a scatter radiation detector, which does not move during the scanning of the object of interest.

Advantageously, since the source of radiation may be the only moving part within the  
15 examination apparatus, the examination apparatus may be compact and easily transportable. Also, no readjustment of moving parts may be required after the apparatus has been moved.

According to another exemplary embodiment of the present invention as set forth in  
20 claim 2, the source of radiation is displaceable along at least a first portion of a first circular path. Advantageously, by moving the source of radiation along a portion of a circular path, a two-dimensional segment of the object of interest may be scanned. Since the source of radiation may only be moved along a portion of the first circular path and not along the whole circular path, the size of the examination apparatus may be  
25 reduced.

According to another exemplary embodiment of the present invention as set forth in claim 3, a location of a region within the object of interest from which scatter originates is reflected onto a coordinate of the scatter radiation detector. Advantageously,  
30 according to this exemplary embodiment of the present invention, each coordinate of the detection area of the scatter radiation detector corresponds to a respective location of

a scatter center within the object of interest. Therefore, by determining the coordinate of the scatter radiation detector on which a scatter radiation has been detected, the location of the scattering center within the object of interest may be derived.

5 According to another exemplary embodiment of the present invention as set forth in claim 4, the scatter radiation detector is stationary arranged around a rotational axis during scanning of the object of interest and extends along a portion of a second circular path around the rotational axis. Furthermore, the scatter radiation detector comprises at least one detector element, wherein the at least one detector element is arranged along  
10 the portion of the second circular path, which corresponds to the first portion of the first circular path. The at least one detector element is an energy-resolving detector element and the coordinate of the scatter radiation detector, on which a height of the region within the object of interest from which scatter originates is coded, is a radial coordinate.

15 Advantageously, according to this exemplary embodiment of the present invention, the scatter radiation detector may comprise a plurality of detector elements which may be adapted for performing an energy-resolving detection of scattered radiation. Since the detectors elements are arranged along the portion of the second circular path, the  
20 vertical coordinate or the height of the region within the object of interest from which scatter originates may be derived from the radial coordinate of a detected scatter event.

According to another exemplary embodiment of the present invention as set forth in claim 5, the examination apparatus further comprises a primary collimator for  
25 collimating the first radiation such that the first radiation has a wedge shape and converges at a stationary point of the transmission detector. Furthermore, the examination apparatus comprises a secondary collimator for absorbing radiation propagating in a direction different from the direction defined by a cone semi angle and a scatter angle and comprises a transmission detector for receiving a third radiation  
30 attenuated by the object of interest. The transmission detector may be stationary during scanning of the object of interest.

Advantageously, according to this exemplary embodiment of the present invention, no moving parts or alignment mechanisms have to be provided for the transmission detector, since it may be immovably mounted on the examination apparatus and still  
5 detect transmitted radiation. By absorbing radiation which does not propagate in a pre-defined direction, the secondary collimator passes only scatter radiation to the scatter radiation detector, which contains height information.

According to another exemplary embodiment of the present invention as set forth in  
10 claim 6, the secondary collimator comprises a plurality of channels formed by a radiation-absorbing material, wherein each of the channels of the plurality of channels is oriented with respect to the direction defined by the cone semi angle and the scatter angle.

15 Advantageously, according to an aspect of this exemplary embodiment of the present invention, the channels may be formed of a material such as steel which strongly absorbs electromagnetic radiation, such as x-rays, not propagating parallel to the channel orientation. A collimator of steel channels or steel lamella provides an efficient means for filtering unwanted radiation.

20 According to another exemplary embodiment of the present invention as set forth in claim 7, the rotational axis is defined by a center of the first circular path and a center of the second circular path, wherein the rotational axis is perpendicular to a first area encircled by the first circular path and perpendicular to a second area encircled by the  
25 second circular path. Furthermore, the transmission detector is stationary arranged on the rotational axis, wherein the stationary point of the transmission detector at which the first radiation converges is located in a detection center of the transmission detector and wherein the third radiation converges at the stationary point while the source of radiation moves along a portion of the first circular path.

Advantageously, according to this exemplary embodiment of the present invention, the first radiation and the third radiation, which results from the first radiation by attenuation of the object of interest, always converge at the stationary point of the transmission detector, independent of the movement of the radiation source.

5

According to another exemplary embodiment of the present invention as set forth in claim 8, the examination apparatus is transportable and adapted for baggage inspection.

Furthermore, the source of radiation is a polychromatic x-ray source. Advantageously, according to this exemplary embodiment of the present invention, objects may be

10 

examinable, which cannot be transported to a stationary suitcase or baggage scanner.

This may be of particular interest for airport security applications. Furthermore, since no monochromatic radiation is needed for examination of the object of interest, no intensity-reducing monochromators have to be incorporated into the examination apparatus and therefore, a high intensity of radiation is available for inspection.

15 

However, this may also be advantageous for other applications, such as medical applications, allowing to bring the scanner to an immovable patient or industrial application.

20 

According to another exemplary embodiment of the present invention as set forth in claim 9, the source of radiation comprises a laser pointer. A laser beam of the laser pointer is aligned with the third radiation such that the laser beam of the laser pointer propagates parallel to the third radiation beam and aims on the stationary point, which facilitates the alignment of the examination apparatus and in particular of the radiation source, since the laser beam may be visible for the human eye.

25

According to another exemplary embodiment of the present invention as set forth in claim 10, the examination apparatus further comprises a calculation unit for reconstructing an image from readouts of the transmission detector and the scatter radiation detector. Furthermore, the examination apparatus may also be adapted for the

30 

detection of explosives, for example for the application as x-ray baggage inspection

system at airports, which automatically discriminates explosive materials on the basis of the reconstructed coherent scatter function images based on readouts of the transmission detector and the scatter radiation detector by, for example, comparing reconstructed scatter functions with predetermined tables of characteristic measurements for such  
5 explosives.

According to another exemplary embodiment of the present invention as set forth in claim 11, the above object may also be solved with a method of examining an object of interest with an examination apparatus, wherein a source of radiation is energized such  
10 that the source of radiation generates a first radiation adapted to penetrate the object of interest. Then, an energy measurement of the second radiation scattered from the object of interest by means of a scatter radiation detector with energy resolving detector elements is performed, wherein the scatter radiation detector is stationary during the scanning of the object of interest. During the scanning of the object of interest, the  
15 source of radiation may be displaced.

Advantageously, according to this exemplary embodiment of the present invention, a method may be provided which allows for a fast and easily applicable material discrimination of the object of interest. Also, the method may provide for a location and  
20 orientation independent examination of a patient in medical applications or industrial applications.

According to another exemplary embodiment of the present invention as set forth in claim 12, the source of radiation is displaced along at least a first portion of a first  
25 circular path. Advantageously, moving the source of radiation along a path which is circular provides for an easy alignment of the first radiation beam.

According to another exemplary embodiment of the present invention as set forth in claim 13, a location of a region within the object of interest from which scatter  
30 originates is coded on a coordinate of the scatter radiation detector. Therefore,



according to this exemplary embodiment, by reading out the scatter radiation detector, the position of the scattering center may be derived directly.

5 According to another exemplary embodiment of the present invention as set forth in claim 14, a rotational axis is defined by a center of the first circular path and a center of the second circular path. Advantageously, first and second circular paths define a first and a second area, respectively, which are parallel to each other and perpendicularly intersected by the rotational axis. The scatter radiation detector is arranged at least at a second portion of the second circular path.

10

According to another exemplary embodiment of the present invention as set forth in claim 15, an apparatus, which comprises the source of radiation and the scatter radiation detector, is moved to a location of the object of interest and after that, the object of interest is examined. Advantageously, according to this exemplary embodiment of the present invention, the object of interest does not have to be moved in order to be examined. This may be of particular interest in case the object of interest is a piece of suspicious luggage which may contain explosives.

15

According to another exemplary embodiment of the present invention as set forth in claim 16, a laser pointer is activated, wherein a laser beam of the laser pointer is aligned with the third radiation. After that, the laser beam is aimed at the scatter radiation detector in order to align the radiation source for scanning.

20

Advantageously, since the laser beam may be visible for the human eye, alignment of the whole system is facilitated without the use of a detector.

25

Claim 17 relates to a computer program product stored on a computer-readable medium which executes the steps of the method according to the present invention when executed on an examination apparatus. Advantageously, this computer program allows for a reduction of computation power in the examination apparatus.

30

It may be seen as the gist of an exemplary embodiment of the present invention that an examination of an object of interest is provided by moving a source of radiation during scanning of the object of interest and detecting a transmitted beam of radiation, which is generated by the source of radiation and attenuated by the object of interest, and a  
5 scattered radiation, which is scattered by the object of interest under a particular scatter angle. Advantageously, by detecting the scatter radiation scattered under the particular scatter angle, the vertical coordinate of the location of the scatter center in the object of interest and it's composition may be derived.

10 These and other aspects of the present invention will become apparent from and elucidated with reference to the embodiments described hereinafter.

Exemplary embodiments of the present invention will be described below with reference to the following drawings:

15

Fig. 1 shows a schematic representation of an exemplary embodiment of an examination apparatus according to the present invention.

Fig. 2 shows a flow-chart of an exemplary embodiment of a method of operating the  
20 examination apparatus of Fig. 1 for examining an object of interest according to the present invention.

The examination apparatus according to an exemplary embodiment of the present invention as depicted in Fig. 1 shows a source of radiation 1, which may be a  
25 polychromatic x-ray source 1. The x-ray source 1 is mounted on a segment of a circular track such that it is movable between the points A and A' on an arc having the vertical axis PO. The x-ray source 1 has a linear focus of dimensions about 0.5 mm x 50 mm tangentially to the direction of movement. The x-ray source 1 is provided with a primary collimator or first collimator (not shown in Fig. 1 for clarity), so that the  
30 primary x-ray beam or first radiation beam 2 has a wedge shape and converges at the

detector plane of the transmission detector 6 on the point O. The primary collimator or first collimator may be designed based on the "Soller sits" principle and comprises an array of e.g. steel lamella directed to O.

- 5 Independent of the angular position  $\phi$  of the x-ray source 1 on the circular track 8, the x-ray source is arranged such that the first radiation beam 2 passes through the point O. Due to this, and since the x-ray source 1 moves along a portion 9 of the circular track 8, the first radiation beam 2 travels along a surface of a cone of semi-opening angle  $\alpha$ . In order to facilitate alignment of the system, the x-ray tube housing (not shown in Fig. 1)
- 10 may be provided with a laser pointer 10. Advantageously, it may be ensured before scanning that the laser beam always passes through O as the x-ray tube is moved along the circular track.

- A suitcase 11 is gradually moved in the direction of the arrow depicted in Fig. 1 while
- 15 the x-ray source tracks in azimuthal angle  $\phi$  repeatedly between the locations A and A'. X-rays scattered from the suitcase at an angle of  $\theta$  relative to the first radiation beam are permitted by the second collimator (not shown in Fig. 1) to reach a scatter radiation detector 5. The lowest and highest scatter centers which may be detected by an examination apparatus such as depicted in Fig. 1 are  $S_1$  and  $S_2$ , respectively, which are
- 20 determined by the dimensions of the detectors 5, 6. The height of the region within the suitcase from which scatter originates is coded onto the radial coordinate of the scatter radiation detector 5 as indicated in Fig. 1. A position of the x-ray 1 source determines a horizontal position of a scatter voxel, i.e. of an information element derived from the detectors 5 and 6, which includes a measured intensity and location component. The
- 25 examination apparatus depicted in Fig. 1 thus permits x-rays at constant angle of scatter to be recorded in the detector while preserving a unique coding between the position in 3-D of the scatter voxel and the positions of the x-ray source, a conveyor belt on which the suitcase is transported and the radial coordinate of the detector array 5.

The scatter radiation detector may be composed of several, e.g. 12, radial segments together with the transmission detector 6. The whole array of scatter radiation detectors 5 and transmission detector 6 is arranged on a rotational axis 7 and does not move during scanning of the object of interest. The detector array of scatter radiation  
5 detectors 5 and transmission detectors may have the shape of a segment of a circle, which corresponds to the first portion of the first circular path AA', as may be taken from Fig. 1. However, other forms may be possible such as a square shaped detector including detectors 5 and 6. The form, size and location of the detectors 5 and 6 of the scanner are selected in accordance with the path of the source of radiation during the  
10 scanning. Also the desired maximum scatter angle may be used for designing form, shape, location, dimensions and arrangement of the detectors 5 and 6. For circular source path, circular detectors 5 and 6 may be advantageous. For elliptical source path, elliptical detectors 5 and 6 may be advantageous. For linear source paths or source paths which are composed by linear segments, correspondingly arranged rectangular detectors  
15 5 and 6 may be used.

Typical detector materials include the semi-conductors Ge, CdTe and CdZnTe. The detector array permits energy-resolution (photon spectroscopy) and outputs signals of the energy spectrum of x-rays falling on each segment in a way which is well-known in  
20 the art and is therefore herein not described in greater detail. The resulting spectra may then be analyzed with standard software algorithms, as described in e.g. G. Harding and B. Schreiber "Coherent X-ray scatter imaging and its application in biomedical science and industry", Radiation Physics and Chemistry 56, (1999) 229-245, which is hereby incorporated by reference, to identify the material composition of the object of interest.

25

It should be noted that during scanning the whole detector array 5, 6 is stationary and the only moving part of the examination apparatus is the x-ray source 1.

The stationary point O of the transmission detector 6 at which the first radiation 2  
30 converges is located in a detection center of the transmission detector 6. When the first radiation 2 penetrates the object of interest, it is attenuated by the object of interest,

resulting in a third radiation 4. But since attenuation of the first radiation does not lead to a remarkable deflection of the radiation beam, the attenuated third radiation 4 still converges at the stationary point O, while the source of radiation 1 is moving along a portion 9 of the first circular path 8. The read outs of the attenuation detector 6 may be  
5 used for absorption correction as e.g. described in van Stevendaal et al: "A reconstruction algorithm for coherent scatter computed tomography based on filtered back-projection", Med. Phys. 30(9), September 2003, which is hereby incorporated by reference.

10 The second collimator comprises a plurality of parallel channels oriented at the angle  $\alpha$ - $\theta$  relative to the vertical axis PO, which are spaced corresponding to the spacing between adjacent detectors 5 of the detector array 5, 6. These channels may be formed from a material such as steel, which strongly absorbs x-rays not traveling parallel to the channel orientation. To ensure that the scatter radiation falls on the detector array at  
15 constant angle  $\theta$ , irrespective of the azimuthal angle  $\phi$ , radial collimator of steel lamella may be incorporated into the second collimator.

If necessary, electro-mechanical actuators (not shown in Fig. 1) may be employed automatically to align the first or second collimators and the scatter radiation detector 5  
20 or the transmission detector 6 before a scan is performed.

Since the x-ray source is the only moving part (apart from a possible conveyor belt 12 and the electro-mechanical actuators), the arrangement is compact and easily transported. It should be noted that the whole examination apparatus shown in Fig. 1  
25 may be mounted on and transported with a vehicle such as a fork-lift truck or else.

The detector array 5, 6 is connected to a calculation unit 13. The calculation unit 13 receives the detection results from the detector array 5, 6 and determines a scanning result on the basis of the detection results from the detector array 5, 6. In addition, the  
30 calculation unit 13 communicates with a motor control unit 16 in order to coordinate the

movement of the x-ray source 1 and the conveyor belt 12. Furthermore, a loudspeaker 14 connected to the calculation unit 13 may be provided for issuing an alarm in case the calculation unit 13 determines that there is a dangerous material within the item of interest 11 or a material which cannot be determined. A signal port 15 may transmit the alarm signal to a subsequent detection level. As may be seen from Fig. 1, the examination apparatus is simpler than alternative arrangements owing to the avoidance of precision movements, since a scatter collimator and detectors 5, 6 are stationary during baggage scanning. Furthermore, the examination apparatus may be very compact and easily transportable. It may thus be well suited to the mobile inspection of suspicious objects. The examination apparatus according to an exemplary embodiment of the present invention fulfils a need which has not yet been met in state of the art coherent-scattered x-ray devices, i.e. bringing the baggage scanner to the suitcase in situations where it is not convenient or possible to bring the suitcase to the scanner. Furthermore, the examination apparatus may be employed for the resolution of alarms issued by spatially-distributed baggage inspection systems. Apart from the application in the field of baggage scanning, the scanning may also be applied in medical applications, such as medical imaging or tumor localization or industrial applications such as material testing.

Fig. 2 shows a flow-chart of an exemplary embodiment of a method of operating an examination apparatus of Fig. 1.

After the start in step S0, the examination apparatus comprising the source of radiation and the scatter radiation detector is moved to a location of the object of interest, such as an item of baggage 11 in step S1. After that, in step S2 a laser pointer is activated and the laser beam of the laser point, which is aligned with the third radiation, is aimed at the stationary point for facilitating alignment of the examination apparatus. In the next step, S4, a source of radiation is energized in order to generate a first radiation adapted to penetrate the object of interest. Then, in step S5, an energy measurement of a second radiation scattered from the object of interest is performed by means of a scatter

radiation detector with energy-resolving detector elements. Then, in step S6, the question is asked whether a sufficient number of energy measurements has been acquired or not. If the answer to this question is no, the source of radiation is displaced along at least a first portion of a first circular path by an increment in step S7. This may  
5 be repeated. If the answer to this question is yes, in step S8, a material in the object of interest is determined on the basis of the readouts and after that a determination is performed, whether the material in the object of interest is an explosive or not. This is done in step S11. If this question is answered with yes, an alarm is issued in step S10. If the question is answered with no, the object of interest is moved. If the full object is  
10 scanned (S12), the method continues to step S13, where it ends.

If the object has not been scanned fully yet, the method is repeated from step S7.

Alternatively, or in addition to step 10, e.g. an image may be reconstructed from the  
15 readouts of the detectors. The image may be displayed on a display.

Advantageously, the method described with reference to Fig. 2, according to an exemplary embodiment of the present invention, is highly time-efficient, since the measurement of the transmitted beam and the energy-resolved scatter projections are  
20 performed at the same time. Also, as mentioned in Step S1 according to this method, the scanning may be performed at the location of the object of interest. Furthermore, by alignment of the source by means of the laser pointer, a simple and precise alignment may be realized without requiring a specially trained operation or service engineer.

**CLAIMS**

1. An examination apparatus for examining an object of interest, the examination apparatus comprising:

a source of radiation for generating a first radiation penetrating the object of interest;

5 a scatter radiation detector for detecting a second radiation of the first radiation; wherein the second radiation is scatter radiation which is scattered from the object of interest;

wherein the scatter radiation detector is stationary during scanning of the object of interest; and

10 wherein the source of radiation is displaceable during the scanning of the object of interest.

2. The examination apparatus of claim 1,

15 wherein the source of radiation is displaceable along at least a first portion of a first circular path.

3. The examination apparatus of claim 2,

20 wherein a location of a region within the object of interest from which scatter originates is coded on a coordinate of the scatter radiation detector.

4. The examination apparatus of claim 3,

wherein the scatter radiation detector is stationary arranged centrally to a rotational axis during scanning of the object of interest and extends along a portion of a second circular path around the rotational axis;



wherein the scatter radiation detector comprises at least one detector element;  
wherein the at least one detector element is arranged along the portion of the  
second circular path;

wherein the portion of the second circular path corresponds to the first portion of  
5 the first circular path;

wherein the at least one detector element is an energy-resolving detector  
element; and

wherein the coordinate of the scatter radiation detector on which a height of the  
region within the object of interest from which scatter originates is coded is a radial  
10 coordinate.

5. The examination apparatus of claim 2, further comprising:

a primary collimator for collimating the first radiation such that the first  
radiation has a wedge shape and converges at a stationary point of the transmission  
15 detector;

a secondary collimator for absorbing radiation which is propagating in a  
direction different from the direction defined by a cone semi angle and a scatter angle;  
and

a transmission detector for receiving a third radiation attenuated by the object of  
20 interest;

wherein the transmission detector is stationary during scanning of the object of  
interest.

6. The examination apparatus of claim 5,

25 wherein the secondary collimator comprises a plurality of channels formed by a  
radiation absorbing material; and

wherein each of the channels of the plurality of channels is oriented with respect  
to the direction defined by the cone semi angle and the scatter angle.

7. The examination apparatus of claim 2,

wherein the rotational axis is defined by a center of the first circular path and a center of the second circular path;

wherein the rotational axis is perpendicular to a first area encircled by the first  
5 circular path and perpendicular to a second area encircled by the second circular path;

wherein the transmission detector is stationary arranged on the rotational axis;

wherein the stationary point of the transmission detector at which the first  
radiation converges is located in a detection center of the transmission detector; and

wherein the third radiation is converging at the stationary point while the source  
10 of radiation is moving along a portion of the first circular path.

8. The examination apparatus of claim 1,

wherein the examination apparatus is transportable and adapted for baggage  
inspection; and

15 wherein the source of radiation is a polychromatic x-ray source.

9. The examination apparatus of claim 1,

wherein the source of radiation comprises a laser pointer; and

wherein a laser beam of the laser pointer, which is aligned with the third  
20 radiation, is aimed on the stationary point for facilitating alignment of the examination  
apparatus.

10. The examination apparatus of claim 1, further comprising:

a calculation unit for reconstructing an image from readouts of the transmission  
25 detector and the scatter radiation detector;

wherein the examination apparatus is adapted for the detection of explosives in  
the object of interest by using readouts from the scatter radiation detector.

11. A method of examining an object of interest with an examination apparatus, the method comprising the steps of:

energizing a source of radiation such that the source of radiation generates a first  
5 radiation adapted to penetrate the object of interest;

performing an energy measurement of a second radiation scattered from the  
object of interest by means of a scatter radiation detector with energy resolving detector  
elements;

wherein the scatter radiation detector is stationary during the scanning of the  
10 object of interest;

displacing the source of radiation during a scanning of the object of interest.

12. The method of claim 11,

wherein the source of radiation is displaced along at least a first portion of a first  
15 circular path.

13. The method of claim 11,

wherein a location of a region within the object of interest from which scatter  
originates is coded on a coordinate of the scatter radiation detector.

20

14. The method of claim 11,

wherein a rotational axis is defined by a center of the first circular path and a  
center of the second circular path;

wherein the rotational axis is perpendicular to a first area encircled by the first  
25 circular path and to a second area encircled by the second circular path;

wherein the scatter radiation detector is arranged at least at a second portion of  
the second circular path.

15. The method of claim 11, further comprising the steps of:

moving an apparatus comprising the source of radiation and the scatter radiation detector to a location of the object of interest; and  
examining the object of interest.

5

16. The method of claim 11, further comprising the steps of:

activating a laser pointer;  
wherein a laser beam of the laser pointer is aligned with the third radiation;  
aiming at the scatter radiation detector for aligning scanning.

10

17. Computer program product stored on a computer readable medium, wherein, when the computer program product is executed on an examination apparatus for examination of an object of interest, the examination apparatus performs the following operation:

energizing a source of radiation such that the source of radiation generates a first  
15 radiation adapted to penetrate the object of interest;  
displacing the source of radiation during a scanning of the object of interest;  
performing an energy measurement of a second radiation scattered from the  
object of interest by means of a scatter radiation detector;  
wherein the scatter radiation detector is stationary during the scanning of the object of  
20 interest.

**ABSTRACT**

Computed examination of an object by using coherent-scattered radiation

Examination apparatus for baggage inspection are usually bulky and comprise mechanical components requiring precision movements. According to an aspect of the

5 present invention, examination of an object of interest is provided by moving a source of radiation during scanning of the object of interest and detecting a transmitted beam of radiation and a scattered radiation, which is scattered by the object of interest under a particular predetermined scatter angle, without moving the detector array.

Advantageously, by detecting the scatter radiation scattered under the predetermined  
10 scatter angle, the vertical coordinate of the location of the scatter center in the object of interest and its composition may easily be derived.

Fig. 1



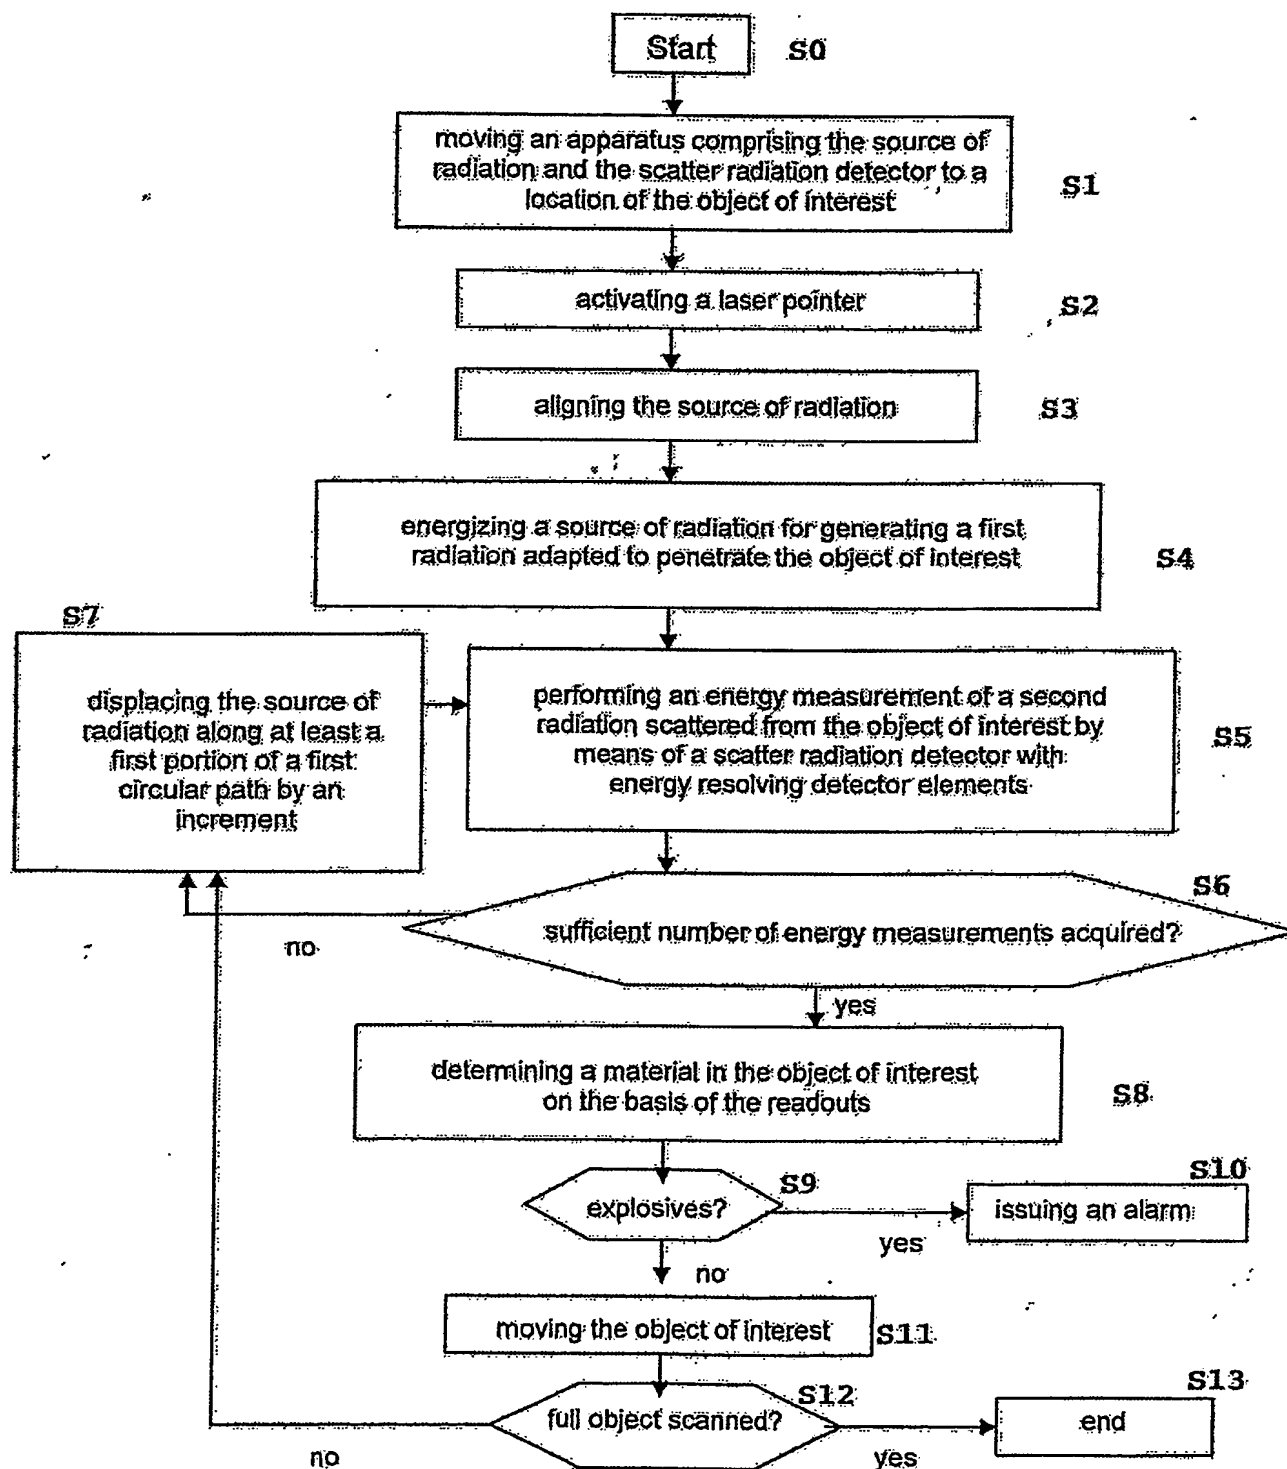


Fig. 2

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**